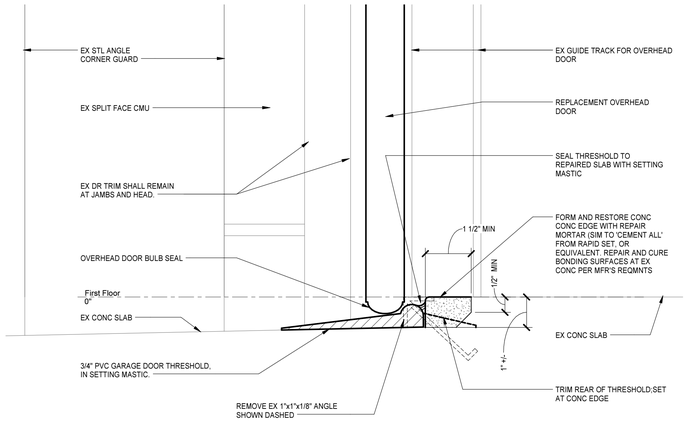

2 OVERHEAD DOOR SILL DTL

A2.1 A3.1 — 6" = 1'-0"

DOOR SCHEDULE

NUMBER	DOOR TYPE	DOOR SIZE (NOMINAL)	DOOR MATL	DOOR LOUVER	DOOR UC	DOOR GLAZING TYPE	FRAME MATERIAL	FRAME TYPE	FRAME HEAD DETAIL	FRAME JAMB DETAIL	FRAME SILL DETAIL	FIRE RATING	NOTES
101A	F	3'-0"x6'-8"x1-3/4"	STL				STL	1	4/A3.1	4/A3.1			
101B	F	3'-0"x6'-8"x1-3/4"	STL				STL	1	5/A3.1	4/A3.1			
102	RP	2'-0"x6'-8"x1-3/4"	WD				STL	1					1
103	F	2'-8"x6'-8"x1-3/4"	WD				STL	1					1
104	F	2'-8"x6'-8"x1-3/4"	WD				STL	1					1
105	F	3'-0"x6'-8"x1-3/4"	WD				STL	1	3/A3.1	3/A3.1			
106	F	3'-0"x6'-8"x1-3/4"	WD				STL	1					1
107	F	3'-0"x6'-8"x1-3/4"	WD				STL	1					1
108	F	2'-8"x6'-8"x1-3/4"	WD				STL	1					1
109	F	2'-6"x6'-8"x1-3/4"	WD				STL	1					1
111	F	2'-8"x6'-8"x1-3/4"	WD				STL	1					1
112	F	2'-6"x6'-8"x1-3/4"	WD				STL	1					1
114	F	3'-0"x6'-8"x1-3/4"	WD				STL	1					1
115A	F	3'-0"x6'-8"x1-3/4"	WD				STL	1					1
115B	F	3'-0"x6'-8"x1-3/4"	STL				STL	1	4/A3.1	4/A3.1			
116A	OH	12' x 12'-2"	STL				STL	SEE DTLS			2/ A3.1		
116B	OH	12' x 12'-2"	STL				STL	SEE DTLS			2/ A3.1		
116C	OH	12' x 12'-2"	STL				STL	SEE DTLS			2/ A3.1		
116D	OH	12' x 12'-2"	STL				STL	SEE DTLS			2/ A3.1		
116E	F	3'-0"x6'-8"x1-3/4"	STL				STL	1	4/A3.1	4/A3.1			
116F	F	3'-0"x6'-8"x1-3/4"	STL				STL	1	4/A3.1	4/A3.1			
116G	OH	12' x 12'-2"	STL				STL	SEE DTLS			2/ A3.1		
116H	OH	12' x 12'-2"	STL				STL	SEE DTLS			2/ A3.1		
116J	OH	12' x 12'-2"	STL				STL	SEE DTLS			2/ A3.1		
116K	OH	12' x 12'-2"	STL				STL	SEE DTLS			2/ A3.1		
117	F	3'-0"x6'-8"x1-3/4"	STL				STL	1	5/A3.1	5/A3.1			
118	F	2'-8"x6'-8"x1-3/4"	WD				STL	1	3/A3.1	3/A3.1			
119	F	2'-8"x6'-8"x1-3/4"	WD				STL	1	3/A3.1	3/A3.1			2
120	F	3'-0"x6'-8"x1-3/4"	WD				STL	1	6/A3.1	6/A3.1			
121	F	3'-0"x6'-8"x1-3/4"	WD				STL	1					1
122	F	3'-0"x6'-8"x1-3/4"	WD				STL	1	6/A3.1	6/A3.1			
123	F	3'-0"x6'-8"x1-3/4"	WD				STL	1	6/A3.1	6/A3.1			

DOOR SCHEDULE NOTES:

1. EXISTING DOOR AND FRAME SHALL REMAIN. REFER TO 087100 FOR DOOR HARDWARE MODIFICATIONS
2. DOOR HARDWARE SHALL INCLUDE DEADBOLT



4 DOOR HEAD DTL (JAMB SIM)

NO SCALE



3 DOOR HEAD DTL (JAMB SIM)

1 1/2" = 1'-0"



DBL RABBET

STEEL FRAME SECTION



STLEE FRAME TYPES

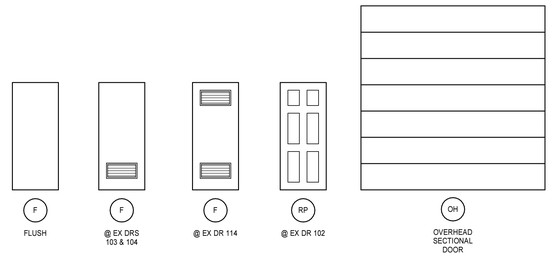

DOOR TYPES



6 DOOR HEAD DTL (JAMB SIM)

NO SCALE



5 DOOR HEAD DTL (JAMB SIM)

NO SCALE

FINISH SCHEDULE

NUMBER	NAME	FLOOR	BASE	WALLS NORTH	WALLS EAST	WALLS SOUTH	WALLS WEST	WAINSCOT	CEILING	NOTES
101	CORRIDOR	VCT	RB	PT	PT	PT	PT	EPX-PT	ACP	
102	CLOSET	VCT	RB	PT	PT	PT	PT	--	GB-PT	
103	AMMO/ RANGE STORAGE	VCT	RB	PT	PT	PT	PT	--	ACP	
104	SUPPLY STORAGE	VCT	RB	PT	PT	PT	PT	--	ACP	
105	IT/ DATA	VCT	RB	PT	PT	PT	PT	--	ACP	
106	WOMEN	EX-CT	EX-GWT	EPX-PT	EPX-PT	EPX-PT	EPX-PT	--	ACP	
107	MEN	EX-CT	EX-GWT	EPX-PT	EPX-PT	EPX-PT	EPX-PT	--	ACP	
108	MEN'S BREAK	C-TILE	RB	PT	PT	PT	PT	--	ACP	
109	MEN	EX-CT	EX-GWT	EPX-PT	EPX-PT	EPX-PT	EPX-PT	--	EX-PT	
110	SHOWER	EX-GWT	EX-GWT	PT	PT	PT	PT	--	EX-GWT	
111	WOMEN'S BREAK	C-TILE	RB	PT	PT	PT	PT	--	ACP	
112	WOMEN	EX-CT	EX-GWT	EPX-PT	EPX-PT	EPX-PT	EPX-PT	--	EX-PT	
113	SHOWER	EX-GWT	EX-GWT	PT	PT	PT	PT	--	EX-GWT	
114	UTILITY ROOM	VCT	RB	PT	PT	PT	PT	--	ACP	
115	FITNESS/ TRAINING ROOM	RAF-RFT	RB	PT	PT	PT	PT	--	ACP	
116	VEHICLE BAYS	CONC-SLR	PT-DF	PT-DF	PT-DF	PT-DF	PT-DF	--	EXPC-PT-DF	
117	BAG & TAG	VCT	RB	PT	PT	PT	PT	--	ACP	
118	EVIDENCE OFFICER	VCT	RB	PT	PT	PT	PT	--	ACP	
119	LARGE EVIDENCE	CONC-SL	PT	PT	PT	PT	PT	--	ACP	
120	PROPERTY & EVIDENCE	VCT	RB	PT	PT	PT	PT	--	ACP	
121	MECH/ ELEC	CONC-SL	PT	PT	PT	PT	PT	--	ACP	
122	GUN CLOSET	VCT	RB	PT	PT	PT	PT	--	ACP	
123	DRUG CLOSET	VCT	RB	PT	PT	PT	PT	--	ACP	

DOOR AND FRAME GENERAL NOTES

A. DOOR AND FRAME DETAILS INDICATE GENERAL CHARACTERISTICS OF DOOR AND FRAME SIZES AND COMPONENTS AND MAY NOT INDICATE EXACT FIELD CONDITIONS OR REQUIREMENTS. COORDINATE DETAILS WITH OTHER DRAWINGS AND SPECS TO DETERMINE ALL COMPONENTS (E.G., SEALANTS, ANCHORS, HARDWARE, LINTELS, CLIPS) REQUIRED FOR COMPLETE AND FUNCTIONAL INSTALLATION.

B. DOOR SWINGS ON FLOOR PLANS TAKE PRECEDENCE OVER SWINGS INDICATED ELSEWHERE (E.G., ELEVATIONS).

MOSELEYARCHITECTS
3200 NORFOLK STREET, RICHMOND, VA 23230
PHONE (804) 794-7555 FAX (804) 355-5690
MOSELEYARCHITECTS.COM

COMMONWEALTH OF VIRGINIA
J. SEELETH
Lic. No. 009147
10/15/2015
ARCHITECT

EVIDENCE STORAGE BUILDING

SMITHFIELD, VIRGINIA

PROJECT NO: 550322	DATE: OCTOBER 15, 2015

REVISIONS

DATE	DESCRIPTION

FINISH & DOOR SCHEDULES, DETAILS

A3.1

10/16/2015 1:20:52 PM